


60# GAUGES

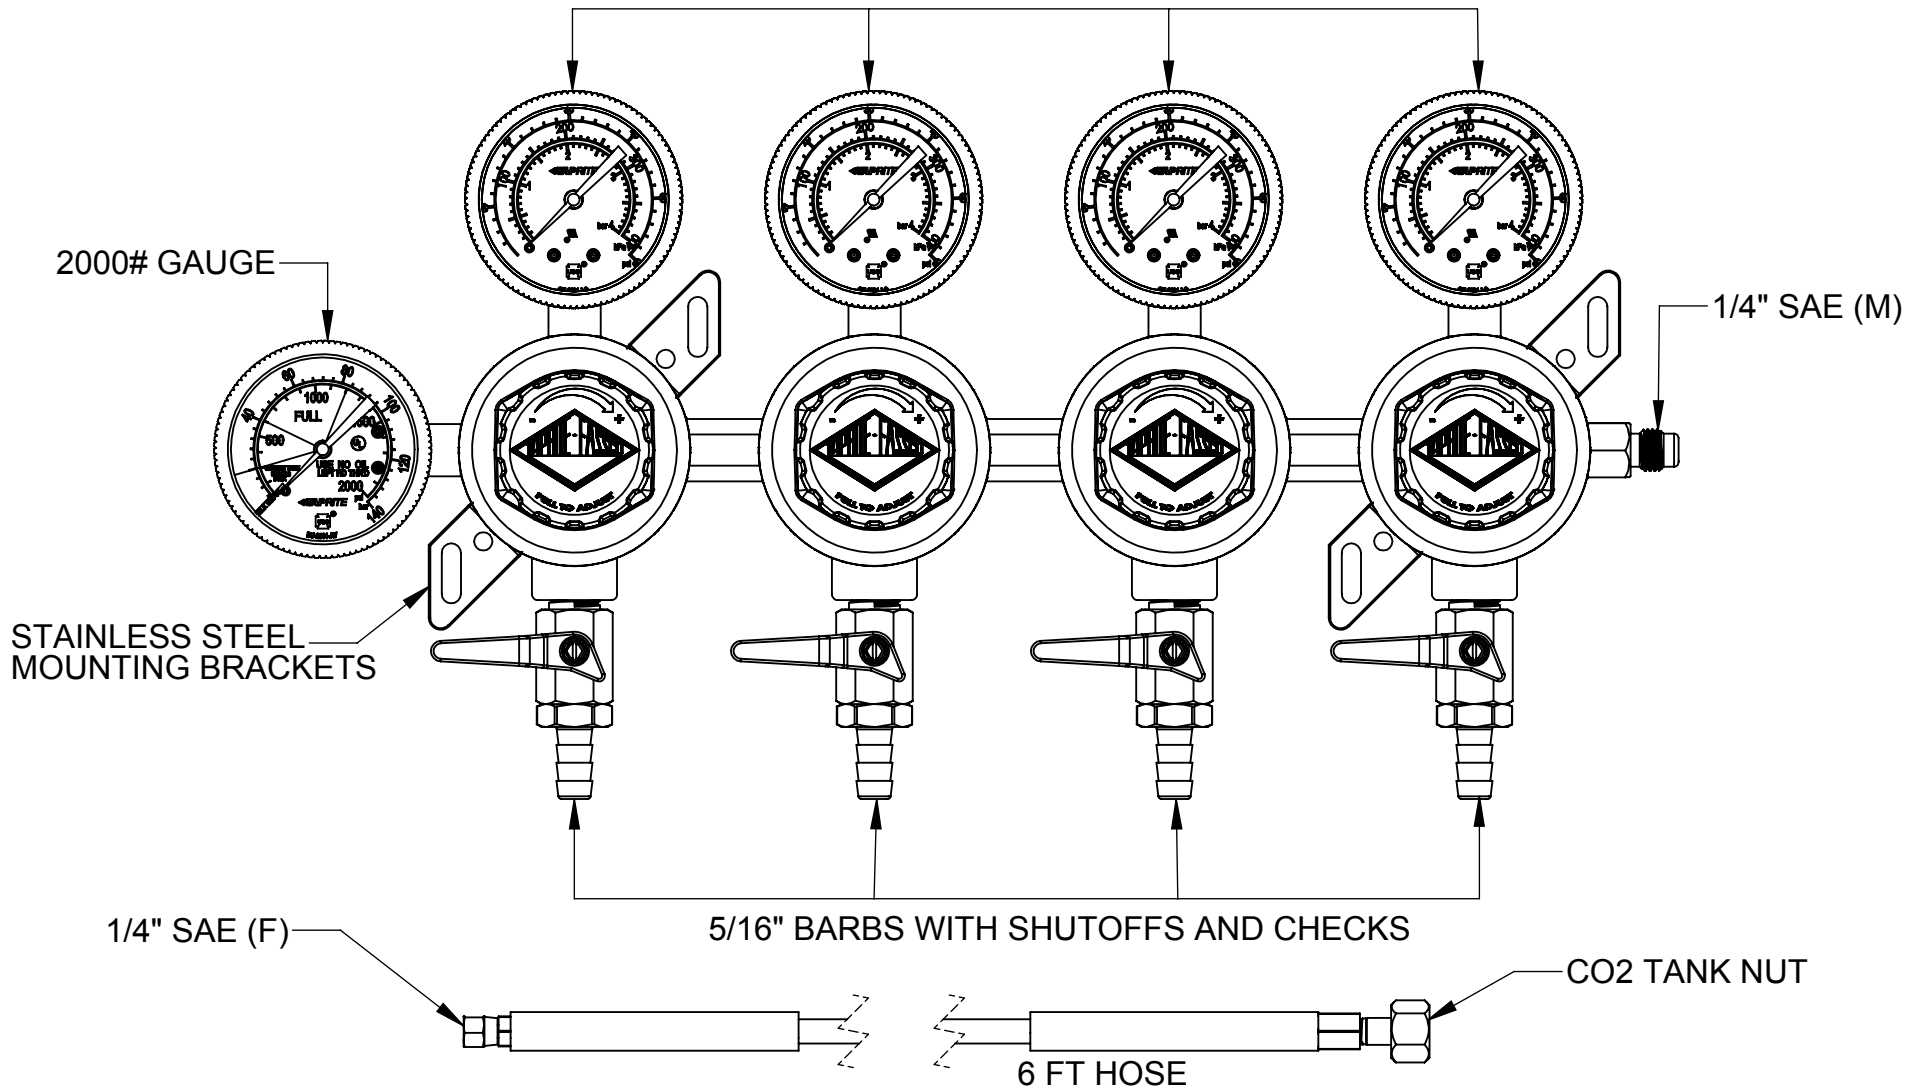

**NOTES:**

1. INLET: 1/4" FLARE FOR 6' HOSE WITH CO2 TANK CONNECTION
2. OUTLES: 5/16" BARB SHUTOFFS W/CHECK
3. GAUGES: 60# (4 EA) AND 2000#
4. SAFETY BLOWOFF: 60 ± 5 PSI
5. WORKING PRESSURE: 0-50 PSI
6. POLY BONNETS WITH ADJ. RED CAPS

MATERIAL	NAME	DATE
	DRAWN	JPK 02/29/12
FINISH	ENG APPR.	
	<b>PROPRIETARY AND CONFIDENTIAL</b>	
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/64 ANGULAR: MACH ± 1/2° BEND ± TWO PLACE DECIMAL ± 0.015 THREE PLACE DECIMAL ± 0.005		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TAPRITE-FASSCO MFG., INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TAPRITE-FASSCO MFG., INC. IS PROHIBITED.		



TITLE:  
**REG, PRI, BEER, 4P4P, 60#, 6' HOSE W/CO2, 5/16B-CV SHUTOFF, 2000#, RED, WALL MNT**

SIZE	DWG. NO.	REV
<b>A</b>	T772WMHP-6_SALES	<b>A</b>

SCALE: 1:2      DO NOT SCALE DRAWING      SHEET 1 OF 1